





Professional cranes & hoists for lifting

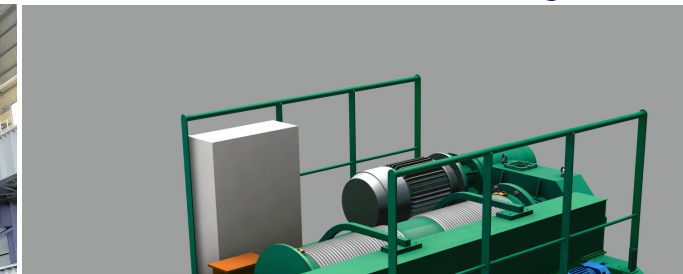

Economy Wire Rope Crab



CHENG DAY MACHINERY WORKS CO., LTD.


No. 173, Wen Chiu Road, Dajia District, Taichung City, 437 Taiwan.
Tel: +886-4-2688-1581 Fax: +886-4-2688-1509
Website: www.chengday.com E-mail: info@chengday.com.tw

- Revision of May, 2023 (Edition No.4) #950196
- No further notice while sizes and dimensions update; Quotations are based on practical dimensions.
- Due to the printing factors, the color of the products is subject to minor deviation from the physical objects.



CHENG DAY MACHINERY WORKS CO., LTD.

FEATURES

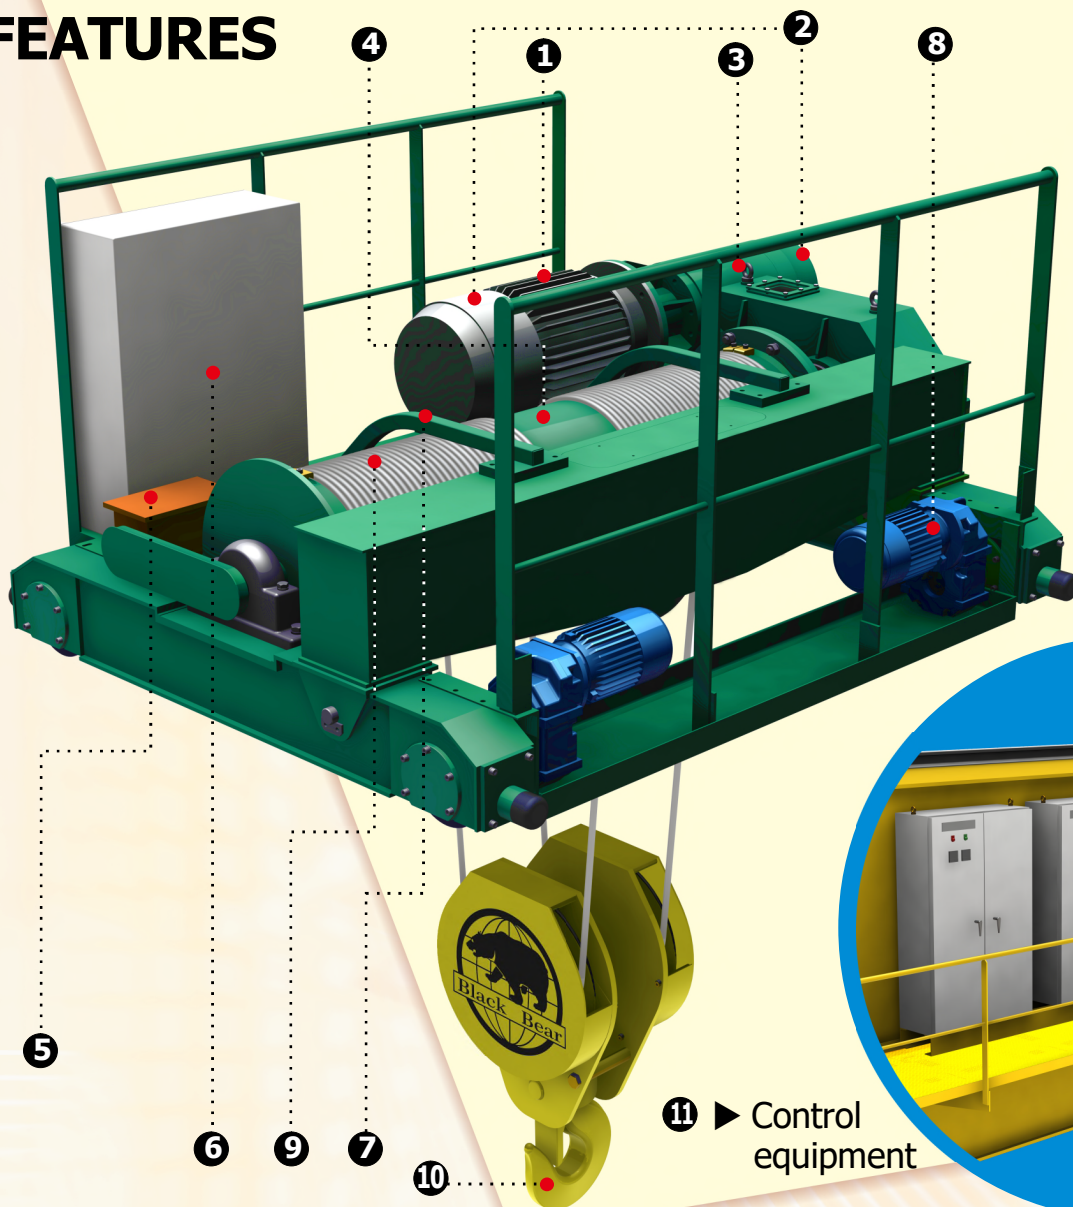

① Hoisting motor

Highly efficiently squirrel cage motors which especially designed for hoist are applied and comply with IEC specification with insulation F degree and start torque over 200%.

② Electromagnetic disc type dual DC brake

Use electromagnetic disc type brake of Lenze, the biggest supplier in Germany, to perform the brake torque over 250% with durable wear-resisting, long life, rapid reaction, low noise and convenient for maintenance.

③ Gear box

Apply alloy steel as base materials of gears with hardness higher than HRC 50 degree and oil bath lubrication of gears for long lifespan.

④ Drum

Apply qualified high-strength steel.

⑤ Screw type up/down limit switch

Apply principle of screw rotation to set up/ down limit and terminal limit to avoid crab damage for wrong direction.

⑥ Junction box

Only junction box left on the crab.

⑦ Anti- loose device

Prevent wire rope loose and out of grooves.

⑧ Transmission of traversing

a) Soft Start / Stop Reduction Gear Motor:

Utilize of flywheel inertia, the motor works very smoothly when it starts and stops.

b) Hollow shaft gear reducer motor:

Integrated motor, brake and gear box for easy fabrication and maintenance.

⑨ Wire rope

Safety factor complies with FEM requirements. Dual rope designs for bottom hook stable and easy hanging.

⑩ Bottom hook set

Hooks are made by forged steel with proper diameter of reeving wheel to ensure life span of wire rope.



⑪ Control equipment

Control panel sets on the walkway.

⑫ Anti-sway (Optional function)

Anti-sway for traversing and travelling corrects swing motion during operation.

SPECIFICATION

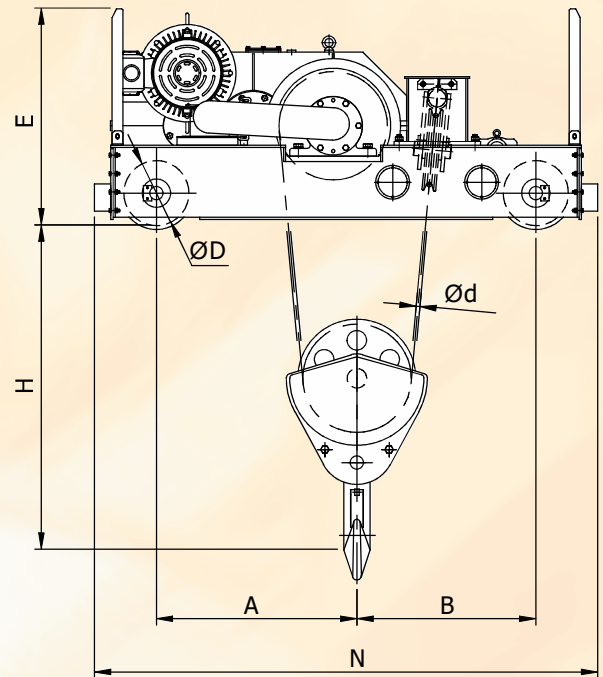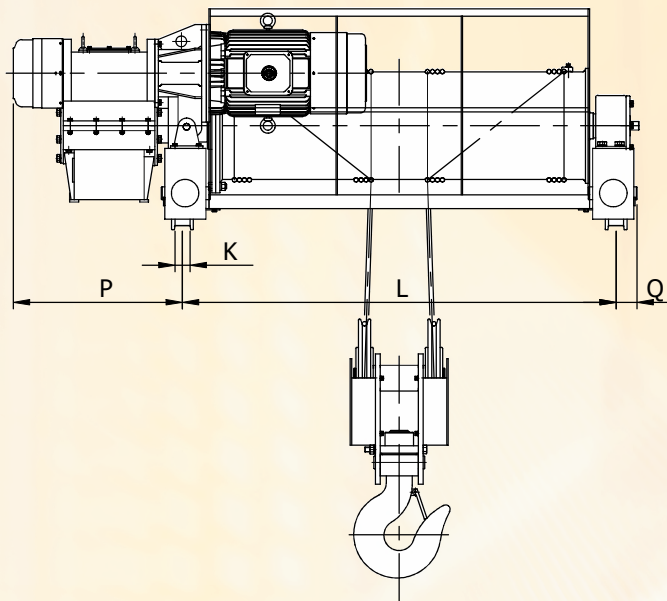

※ Power frequency : 50Hz

※ Motor pole : 4P

Type	Gear box	fall no. (P)	Capacity (ton)	Operation grade			Trolley gauge L (mm)								Wire rope Ød (mm)	Speed (m/min) / Motor (kw)				
				FEM	ISO	ED%	2000	2200	2400	2600	2800	3100	3300	3500						
EWC	E	4	15	2m	M5	40	Lift (m)								Ø18	8.0/30	9.6/37	12.5/45	15/55	20/75
		4	12	3m	M6	50	21	25	28	32	35	41	44	48		8.0/22	9.6/30	12.5/37	15/45	-
		4	9	4m	M7	60	Trolley weight (ton)									8.0/18.5	9.6/22	12.5/30	15/37	20/45
		4	7	5m	M8	60	3.1	3.2	3.4	3.5	3.7	3.9	4.0	4.2		8.0/15	9.6/18.5	12.5/22	15/30	20/37
		8	30	2m	M5	40	Lift (m)								Ø18	4.0/30	4.9/37	6.3/45	7.3/55	9.6/75
		8	24	3m	M6	50	11	12.5	14.5	16	18	20.5	22	24		4.0/22	4.9/30	6.3/37	7.3/45	-
		8	18	4m	M7	60	Trolley weight (ton)									4.0/18.5	4.9/22	6.3/30	7.3/37	9.6/45
		8	14	5m	M8	60	3.8	4.9	4.1	4.3	4.5	4.7	4.9	5.1		4.0/15	4.9/18.5	6.3/22	7.3/30	9.6/37
		12	45	2m	M5	40	Lift (m)								Ø18	2.5/30	2.9/37	3.7/45	4.7/55	6.0/75
		12	36	3m	M6	50	8.5	9.5	11	12.5	13.5	15.5	17	18		2.5/22	2.9/30	3.7/37	4.7/45	-
		12	27	4m	M7	60	Trolley weight (ton)									2.5/18.5	2.9/22	3.7/30	4.7/37	6.0/45
		12	21	5m	M8	60	4.6	4.8	5.0	5.2	5.4	5.7	6.1	6.3		2.5/15	2.9/18.5	3.7/22	4.7/30	6.0/37
	F	4	20	2m	M5	40	Lift (m)								Ø20	6.0/30	7.3/37	9.2/45	10.8/55	14.6/75
		4	16	3m	M6	50	19	23	27	30	34	39	43	46		6.0/22	7.3/30	9.2/37	10.8/45	-
		4	13	4m	M7	60	Trolley weight (ton)									6.0/18.5	7.3/22	9.2/30	10.8/37	14.6/45
		4	10	5m	M8	60	4.2	4.3	4.5	4.6	4.8	5.0	5.2	5.4		6.0/15	7.3/18.5	9.2/22	10.8/30	14.6/37
		8	40	2m	M5	40	Lift (m)								Ø20	3.0/30	3.7/37	4.6/45	5.3/55	7.3/75
		8	32	3m	M6	50	10	12	13.5	15.5	17	20	21.5	23.5		3.0/22	3.7/30	4.6/37	5.3/45	-
		8	26	4m	M7	60	Trolley weight (ton)									3.0/18.5	3.7/22	4.6/30	5.3/37	7.3/45
		8	20	5m	M8	60	5.1	5.3	5.4	5.6	5.8	6.2	6.4	6.7		3.0/15	3.7/18.5	4.6/22	5.3/30	7.3/37
		12	60	2m	M5	40	Lift (m)								Ø20	1.9/30	2.3/37	2.8/45	3.4/55	4.7/75
		12	48	3m	M6	50	8.0	9.5	10.5	12	13.5	15.5	16.5	18		1.9/22	2.3/30	2.8/37	3.4/45	-
		12	39	4m	M7	60	Trolley weight (ton)									1.9/18.5	2.3/22	2.8/30	3.4/37	4.7/45
		12	30	5m	M8	60	6.2	6.4	6.6	6.8	7.2	7.7	7.9	8.3		1.9/15	2.3/18.5	2.8/22	3.4/30	4.7/37
	G	8	50	2m	M5	40	Lift (m)								Ø22.4	3.6/45	4.5/55	6.0/75	-	-
		8	40	3m	M6	50	10	12	13.5	15.5	17.5	20	22	24		3.6/37	4.5/45	-	-	-
		8	30	4m	M7	60	Trolley weight (ton)									3.6/30	4.5/37	6.0/45	-	-
		8	25	5m	M8	60	7.2	7.4	7.6	8.0	8.3	8.7	9.1	9.4		3.6/22	4.5/30	6.0/37	7.3/45	-
		12	75	2m	M5	40	Lift (m)								Ø22.4	2.4/45	3.0/55	4.0/75	-	-
		12	60	3m	M6	50	7.0	8.5	10	11	12.5	14.5	15.5	17		2.4/37	3.0/45	-	-	-
		12	45	4m	M7	60	Trolley weight (ton)									2.4/30	3.0/37	4.0/45	-	-
		12	35	5m	M8	60	8.2	8.5	8.9	9.3	9.6	10.2	10.7	11.1		2.4/22	3.0/30	4.0/37	4.8/45	-
		16	100	2m	M5	40	Lift (m)								Ø22.4	1.8/45	2.3/55	2.8/75	-	-
		16	80	3m	M6	50	6.5	7.5	9.0	10	11	-	-	-		1.8/37	2.3/45	-	-	-
		16	60	4m	M7	60	Trolley weight (ton)									1.8/30	2.3/37	2.8/45	-	-
		16	50	5m	M8	60	9.7	10	10.4	10.7	11.2	-	-	-		1.8/22	2.3/30	2.8/37	3.7/45	-

Product code :

EWC	—	E	—	H	—	15	—	21
Type		Gear box		Reeving/Falling		S.W.L.		Lift
Economy Wire Rope Crab		E, F, G		H:2/4 J:2/8 R:2/12 T:2/16		15ton		21m

Type	Gear box	fall no. (P)	Capacity (ton)	Traversing			Dimensions (mm)								
				Speed (m/min)		Motor kw X 2pcs	H	A	B	ØD	E	K	N	P	Q
				50Hz	60Hz										
EWC	E	4	15	18.3	22	0.75kw 4P	1300	860	760	250	974	63	2170	700	102
		8	30	18.3	22	1.5kw 4P	1700	875	875	300	1152	70	2320	700	102
		12	45	18.3	22	2.2kw 4P	2000	825	825	400	1170	80	2320	720	125
	F	4	20	18.3	22	1.1kw 4P	1400	925	825	300	1101	63	2320	780	102
		8	40	18.3	22	1.5kw 4P	1800	825	825	400	1224	80	2320	793	125
		12	60	18.3	22	2.2kw 4P	2200	645	825	500	1344	80	2350	807	140
	G	8	50	18.3	22	2.2kw 4P	2200	810	660	500	1401	80	2350	936	145
		12	75	18.3	22	3.0kw 4P	2600	700	720	600	1507	80	2350	936	145
		16	100	16.7	20	3.75kw 6P	2800	660	880	500	1501	125	2350	981	205

※ Power frequency : 60Hz

※ Motor pole : 4P

Type	Gear box	fall no. (P)	Capacity (ton)	Operation grade			Trolley gauge L (mm)								Wire rope Ød (mm)	Speed (m/min) / Motor (kw)					
				FEM	ISO	ED%	2000	2200	2400	2600	2800	3100	3300	3500							
EWC	E	4	15	2m	M5	40	Lift (m)								Ø18	9.6/30	11.5/37	15/45	18/55	24/75	
		4	12	3m	M6	50	21	25	28	32	35	41	44	48		9.6/22	11.5/30	15/37	18/45	-	
		4	9	4m	M7	60	Trolley weight (ton)									9.6/18.5	11.5/22	15/30	18/37	24/45	
		4	7	5m	M8	60	3.1	3.2	3.4	3.5	3.7	3.9	4.0	4.2		9.6/15	11.5/18.5	15/22	18/30	24/37	
		8	30	2m	M5	40	Lift (m)								Ø18	4.8/30	5.9/37	7.5/45	8.8/55	11.5/75	
		8	24	3m	M6	50	11	12.5	14.5	16	18	20.5	22	24		4.8/22	5.9/30	7.5/37	8.8/45	-	
		8	18	4m	M7	60	Trolley weight (ton)									4.8/18.5	5.9/22	7.5/30	8.8/37	11.5/45	
		8	14	5m	M8	60	3.8	4.9	4.1	4.3	4.5	4.7	4.9	5.1		4.8/15	5.9/18.5	7.5/22	8.8/30	11.5/37	
		12	45	2m	M5	40	Lift (m)								Ø18	3.0/30	3.5/37	4.4/45	5.6/55	7.2/75	
		12	36	3m	M6	50	8.5	9.5	11	12.5	13.5	15.5	17	18		3.0/22	3.5/30	4.4/37	5.6/45	-	
		12	27	4m	M7	60	Trolley weight (ton)									3.0/8.5	3.5/22	4.4/30	5.6/37	7.2/45	
		12	21	5m	M8	60	4.6	4.8	5.0	5.2	5.4	5.7	6.1	6.3		3.0/15	3.5/18.5	4.4/22	5.6/30	7.2/37	
	F	4	20	2m	M5	40	Lift (m)								Ø20	7.2/30	8.7/37	11/45	12.9/55	17.5/75	
		4	16	3m	M6	50	19	23	27	30	34	39	43	46		7.2/22	8.7/30	11/37	12.9/45	-	
		4	13	4m	M7	60	Trolley weight (ton)									7.2/18.5	8.7/22	11/30	12.9/37	17.5/45	
		4	10	5m	M8	60	4.2	4.3	4.5	4.6	4.8	5.0	5.2	5.4		7.2/15	8.7/18.5	11/22	12.9/30	17.5/37	
		8	40	2m	M5	40	Lift (m)								Ø20	3.6/30	4.4/37	5.5/45	6.4/55	8.7/75	
		8	32	3m	M6	50	10	12	13.5	15.5	17	20	21.5	23.5		3.6/22	4.4/30	5.5/37	6.4/45	-	
		8	26	4m	M7	60	Trolley weight (ton)									3.6/18.5	4.4/22	5.5/30	6.4/37	8.7/45	
		8	20	5m	M8	60	5.1	5.3	5.4	5.6	5.8	6.2	6.4	6.7		3.6/15	4.4/18.5	5.5/22	6.4/30	8.7/37	
		12	60	2m	M5	40	Lift (m)								Ø20	2.3/30	2.7/37	3.3/45	4.1/55	5.6/75	
		12	48	3m	M6	50	8.0	9.5	10.5	12	13.5	15.5	16.5	18		2.3/22	2.7/30	3.3/37	4.1/45	-	
		12	39	4m	M7	60	Trolley weight (ton)									2.3/18.5	2.7/22	3.3/30	4.1/37	5.6/45	
		12	30	5m	M8	60	6.2	6.4	6.6	6.8	7.2	7.7	7.9	8.3		2.3/15	2.7/18.5	3.3/22	4.1/30	5.6/37	
		G	8	50	2m	M5	40	Lift (m)								Ø22.4	4.3/45	5.4/55	7.2/75	-	-
			8	40	3m	M6	50	10	12	13.5	15.5	17.5	20	22	24		4.3/37	5.4/45	-	-	-
			8	30	4m	M7	60	Trolley weight (ton)									4.3/30	5.4/37	7.2/45	-	-
			8	25	5m	M8	60	7.2	7.4	7.6	8.0	8.3	8.7	9.1	9.4		4.3/22	5.4/30	7.2/37	8.7/45	-
			12	75	2m	M5	40	Lift (m)								Ø22.4	2.9/45	3.6/55	4.8/75	-	-
			12	60	3m	M6	50	7.0	8.5	10	11	12.5	14.5	15.5	17		2.9/37	3.6/45	-	-	-
			12	45	4m	M7	60	Trolley weight (ton)									2.9/30	3.6/37	4.8/45	-	-
			12	35	5m	M8	60	8.2	8.5	8.9	9.3	9.6	10.2	10.7	11.1		2.9/22	3.0/30	4.8/37	5.8/45	-
			16	100	2m	M5	40	Lift (m)								Ø22.4	2.2/45	2.7/55	3.3/75	-	-
			16	80	3m	M6	50	6.5	7.5	9.0	10	11	-	-	-		2.2/37	2.7/45	-	-	-
			16	60	4m	M7	60	Trolley weight (ton)									2.2/30	2.7/37	3.3/45	-	-
			16	50	5m	M8	60	9.7	10	10.4	10.7	11.2	-	-	-		2.2/22	2.7/30	3.3/37	4.4/45	-

FEDERATION EUROPEENNE DE LA MANUTENTION

Load spectrum	Cubic mean value Definitions	Average operating time per day in hours							
1 (light)	($k \leq 0.50$) Mechanisms or parts thereof, usually subject to very small loads and in exceptional cases only to maximum loads.	0.25-0.5	0.5-1	1-2	2-4	4-8	8-16	>16	
2 (medium)	($0.50 < k \leq 0.63$) Mechanisms or parts thereof, usually subject to small loads but rather often to maximum loads.	0.12-0.25	0.25-0.5	0.5-1	1-2	2-4	4-8	8-16	>16
3 (heavy)	($0.63 < k \leq 0.80$) Mechanisms or parts thereof, usually subject to medium loads but frequently to maximum loads.	≤ 0.12	0.12-0.25	0.25-0.5	0.5-1	1-2	2-4	4-8	8-16
4 (very heavy)	($0.80 < k \leq 1$) Mechanisms or parts thereof, usually subject to maximum or almost to maximum loads.		≤ 0.12	0.12-0.25	0.25-0.5	0.5-1	1-2	2-4	4-8
Classification of Mechanisms FEM 9.511		1 Dm	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	5 m

ISO/FEM (9.511)

Classification of mechanisms:

1 Dm	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	5 m
M 1	M 2	M 3	M 4	M 5	M 6	M 7	M 8

Classification of mechanisms into groups:


Load spectrum	Cubic mean value	Class of operation time									
		V0.06	V0.12	V0.25	V0.5	V1	V2	V3	V4	V5	
		TO	T1	T2	T3	T4	T5	T6	T7	T8	
		Average operating time per day in hours									
		≤ 0.12	≤ 0.25	≤ 0.5	≤ 1	≤ 2	≤ 4	≤ 8	≤ 16	>16	
1 L1	$k \leq 0.50$			1 Dm	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	
2 L2	$0.50 < k \leq 0.63$		1 Dm	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	5 m	
3 L3	$0.63 < k \leq 0.80$	1 Dm	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	5 m		
4 L4	$0.80 < k \leq 1.00$	1 Cm	1 Bm	1 Am	2 m	3 m	4 m	5 m			

Class of operating time:

Class of operation time	Average operating time per day (in hours)	Calculated total operating time in hours
V0.06 T0	≤ 0.12	200
V0.12 T1	≤ 0.25	400
V0.25 T2	≤ 0.5	800
V0.5 T3	≤ 1	1600
V1 T4	≤ 2	3200
V2 T5	≤ 4	6300
V3 T6	≤ 8	12500
V4 T7	≤ 16	25000
V5 T8	> 16	50000

OPERATION CYCLE

Hoist with one speed

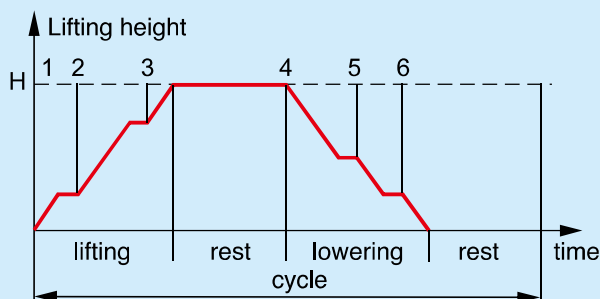

Hoist with two speed

